

BAR OR CABLE PRIMARY CURRENT TRANSFORMERS - RC SERIES



- **Indoor**
- **7.2 - 12 - 17.5 - 24 kV**
- **Primary current from 50 to 12000 A**
- **I_{th} up to 1000 I_{pn} or 100 kA.1s**
- **Cast-resin insulated**
- **Up to 4 separate cores.**

Current transformers vacuum moulded in self extinguishing epoxy resin for the measurement of AC currents from 50 to 12000A. This range is particularly suitable for the measurement of high currents.

Technical data

Rated insulation level	7.2/20/60 kV to 24/50/125 kV
Primary current I _{pn}	50 to 12000 A
Secondary current I _{sn}	5 or 1 A
Frequency	50 or 60 Hz
Rated output	1 to 100 VA
Accuracy class	0.1 - 0.2 - 0.2S - 0.5 - 0.5S - 1 - 3 - 5P - 10P - cIX
Accuracy limit factor	5 - 10 - 15 - 20 - 30
Continuous thermal current	1.2 I _{pn}
Short-time thermal current I _{th}	80 to 1000 I _{pn}
Dynamic current I _{dyn}	2.5 I _{th}
Insulation class	E
Ambient temperature	- 40 °C to + 70 °C
Standards	CEI 44-1 - NF C42502 - VDE 0414 - BS 7626

Other characteristics on request

Secondary current I _{sn}	0.005 to 10 A
Multi-ratio	By secondary tapping
Multiple cores	Up to 4 separate cores
Ambient temperature	Up to +110 °C
Standards	ANSI C57.13 - CAN3 C13 - AS 1675


Accessories/Options

Shield

BAR OR CABLE PRIMARY CURRENT TRANSFORMERS - RC SERIES

Selection table and dimensions

Type	Un kV	Weight kg	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	J mm	K mm	L mm
RC5	12/28/75	17	230	190	140	185	300	106	35	25	135	115	155
RC12	17.5/38/95	27	304	210	140	225	378	180	35	30	160	115	155
RC13	17.5/38/95	36	304	210	140	225	378	130	35	30	160	115	155
RC14	17.5/38/95	33	304	210	140	225	378	140	35	30	160	115	155
RC15	17.5/38/95	18	230	210	140	265	380	106	40	40	135	115	155
RC16	24/50/125	22	254	210	140	290	417	130	40	25	135	115	155
RC17-106	24/50/125	66	346	240	160	335	508	105	40	30	160	120	160
RC17	24/50/125	60	346	240	160	335	508	130	40	30	160	120	160

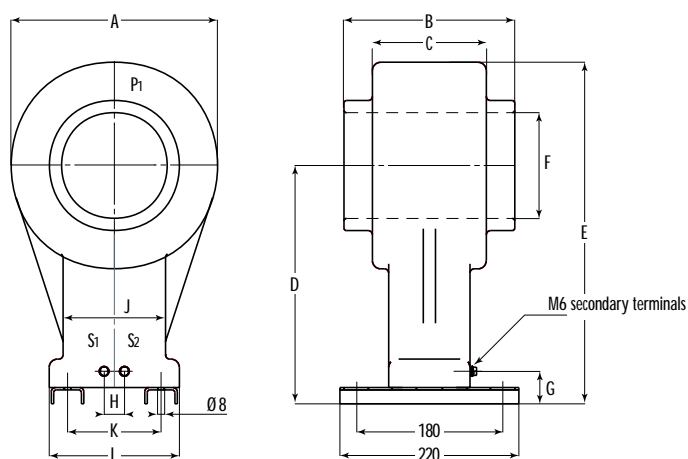

Installation

At 24kV, it is advisable to use a round primary conductor, with a maximum diameter of 100 mm, and centered in the window. A bar may be used provided that its edges are rounded.